

StarBoard Link EZ2

Modular Interactive Whiteboard System




Transform your dry erase board into a fully functioning interactive whiteboard!

Save money, space and time! StarBoard Link EZ2 turns your dry erase whiteboard into an interactive whiteboard and converts already acquired equipment into an engaging interactive environment. Attach the system to any flat surface, connect it to a computer, connect the computer to a projector, a quick set-up routine and you are ready to start teaching with a fully functioning IWB.



Easy installation

StarBoard Link EZ2 secures to any flat surface in minutes to transform a static wall into an interactive environment.



Finger-driven technology

Use your finger, stylus or any object to easily navigate through activities, websites, and multi-media content.



Resizable input area


The size of active area is adjustable - from 60" if the surface is limited, to 90" for the rooms where a bigger size of projection and work space is required.



Interactive Group Work

Up to three users can operate the StarBoard Link EZ2 simultaneously and work in a team on the same task.

StarBoard Link EZ2

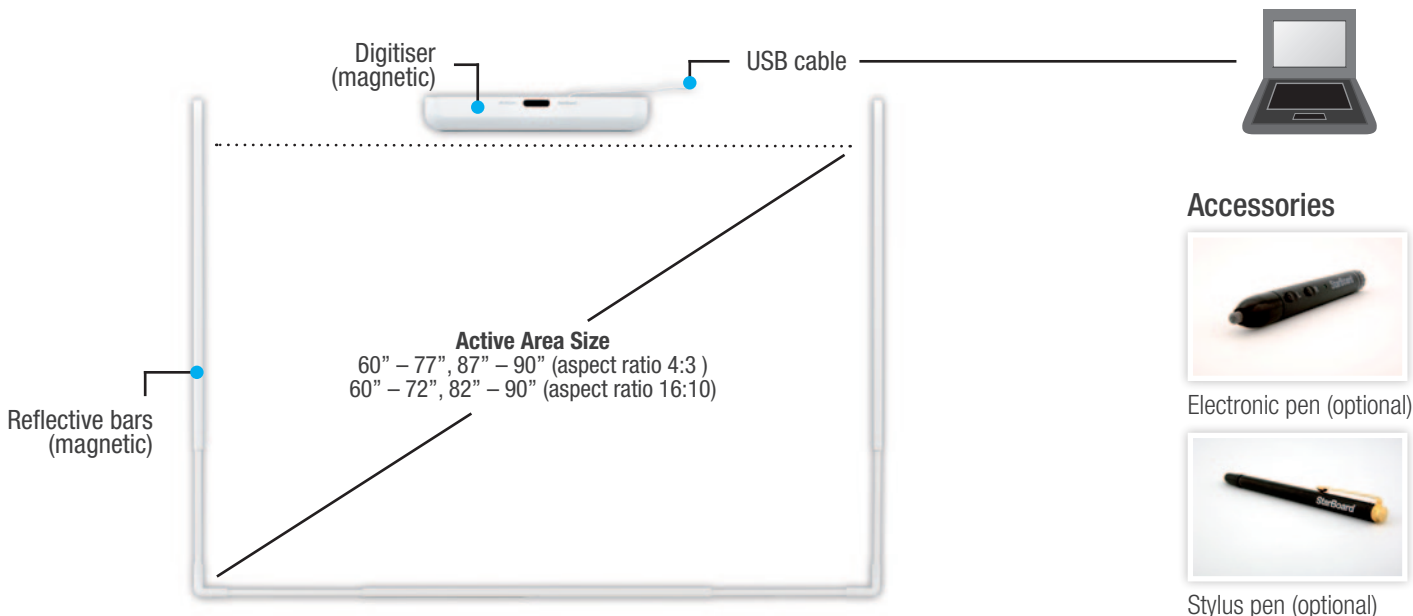

Accessories



Electronic pen (optional)



Stylus pen (optional)



StarBoard software is included with every purchase of StarBoard Link EZ2

- Compatible with most operating systems;
- Customisable floating toolbar;
- Hand writing recognition;
- Direct access to the Internet, Google image search;
- Import Microsoft Office files (Word, PPT...);
- Supports IWB Common File Format* (CFF) for easy sharing of educational content;
- Remote conferencing feature.

* Windows only

Product Specifications (preliminary)

Hardware Specification

Model Name
StarBoard Link EZ2

Digitising Technology
Infrared Image Sensor System

Interface to Computer
USB 1.1, 2.0 (cable length: 6.0 m)

Active Area Size
60" – 77", 87" – 90" (4:3)
60" – 72", 82" – 90" (16:10)

Coordinate Resolution
Approx. 0.05 mm

Tracking Speed
Approx. 66 points/sec

Digitiser Dimensions
510 × 75.5 × 41 mm
20.1 × 3.0 × 1.6 inches

Reflective Bars Dimensions
826 – 1480 × 24 × 21 mm
32.5 – 58.3 × 0.9 × 0.8 inches

Weight
Approx. 1.5 kg (3.3 lbs)

Operating Specification
+5 - +35 °C (41 – 95 °F), 20-80% humidity, without condensation

Storage Specification
-10 - +45 °C (14-113 °F), 20-80% humidity, without condensation

Product Configuration
Digitiser, USB extension cable, Cable holder, Reflective bars, Corner piece, Screws, Starboard Software DVD-ROM, StarBoard Software Startup Guide, StarBoard Link EZ2 Startup Guide.

Certificates
VCCI Class A, FCC Class B, CE

Software Requirements*
* Based on StarBoard Software 9.4

PC Requirements
OS: MS Windows XP (32 bit) / Vista / 7 (32/64bit), latest service pack must be applied (Tablet PC and Server Edition are currently not supported);
CPU: Intel Pentium 4 1.8GHz or higher;
RAM: 1 GB or more is recommended;
HDD: 600 MB of free space;
Display Color Depth: 16bit or more.

Mac Requirements
OS: Mac X 10.5 / 10.6 / 10.7;
CPU: IntelR processor;
RAM: 1 GB or more is recommended;
HDD: 600 MB of free space;
Display Color Depth: 16bit or more.

Linux Requirements
SBS 9.4 for Linux will be released until summer 2012.

**Hitachi Solutions Europe S.A.S.
Interactive Media Solutions Division**
64, rue du Dessous des Berges,
75 013 Paris, France
Tel: +33 (0)153 827 600
Fax: +33 (0)153 827 619
Email: starboard@hitachisolutions-eu.com

**Hitachi Solutions Europe Ltd.
Interactive Media Solutions Division**
City Tower, 40 Basinghall Street,
London EC2V 5DE, United Kingdom
Tel: +44 (0)207 246 6868
Fax: +44 (0)207 246 6860
Email: starboard@hitachisolutions-eu.com

**Hitachi Solutions Europe AG
Interactive Media Solutions Division**
Kurfürstendamm 22,
D-10719 Berlin, Germany
Tel: +49 (0)30 8877 2600
Fax: +49 (0)30 8877 2610
Email: starboard@hitachisolutions-eu.com

www.hitachisolutions-eu.com

Authorized distributor / reseller



Hitachi sets
"Environmental Vision 2025"
www.hitachi.com/environment/

StarBoard