
RP552H Interactive Flat Panel



Input and Output Terminals

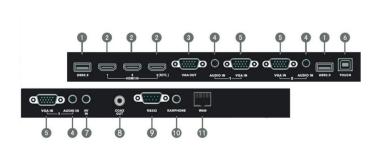

Features


- 10-Points IR Multi-touch
- Touch Driver Free / Multi-Platform Support
- Build-in 6-points Annotation EZWrite SW
- Anti-Glare / Eye Care Mode
- OSD Menu with Touch

No.	Name	Description	
0	USB	Connect USB devices such as mobile hard disk, U disk, USB keyboard	
		and mouse, USB drivers, etc	
0	HDMI IN	High-definition multimedia interface signal input, connect to PC (personal	
		computer) with HDMI output, set-top box, or other video device.	
		Touch signal is also supported. HDMI 3 input supports MHL	
8	VGA OUT	Connect to display devices with VGA input	
4	AUDIO IN	External computer audio input	
6	VGA IN	External computer image input	
6	TOUCH	RP552H has default touch screen. To make external computer touch	
		controlled: the driver should be installed, connect VGA and audio signal	
		of external computer, also connect USB port of external computer	
		to the RP552H. (Default touch function works with PC,VGA and	
		HDMI inputs)	
0	AV IN	Composite video and audio input	
8	COAX OUT	Coaxial output	
9	RS232	Serial interface, used for mutual transfer of data between devices	
0	EARPHONE	Connect to device with headphone input	
0	WAN	Wan interface, connect RJ45 terminals. (Only for Android)	



Product Specific	ations		
nel	Screen Diagonal	55"	
	Backlight	LED	
	Resolution	1920 × 1080	
	Aspect Ratio	16:9	
	Brightness	350 nits	
	Contrast Ratio	1200 : 1	
	Viewing Angle	178° / 178°	
	Color Gamut (x% NTSC)	72%	
	Frame Rate	60Hz	
	Response Time	6ms	
	Panel Bit	8-bit	
	Light Life	30,000 hrs	
	Orientation	Landscape	
uch Solution	Touch Technology	IR	
uch solution	Number of touches	Multi-touch up to 10 touches	
	Touch Interface	USB x 1	
	Resolution	32767 x 32767	
over Glass			
over Glass	Thickness	Tempered, 4 mm	
	Hardness	7H	
	AG Coating	80%	
eaker	Built-in speaker		
erface	Input	Power (AC) inlet x I	
		Audio line-in x 3	
		Composite video x I	
		Composite audio x I	
		D-sub x 3	
		Type A HDMI x 3	
		Type A (USB Playback) x 4	
		R5232 × I	
		LAN x I	
	Output	D-sub x l	
		Earphone × I	
		COAX × I	
	Others	IR receiver × I	
echanical	Dimensions (W \times H \times D) (without packing / with packing)	304 x 800 x 97 mm / 458 x 932 x 220 mm	
	Net Weight / Gross Weight	33kg / 42kg	
wer	Power Supply	AC100 to 240V, 50 to 60 Hz	
	Power Consumption	162W	
5D	On-Screen Display Languages	EN / EF / SP / EP / CN / TC / GM / DT / PL / RS / CZ / DN / SW / IT / RM / FN / NG / GK /	
	.,	TK / AB / JP (21 Languages)	
cessories	Standard	Remote Control w/ Battery × I	
		Power Cord (by region) × 4	
		Touch pen x2	
		Quick Start Guide x I	
		Audio cable x I Touch cable (USB to USB) x I	

Product Specifications

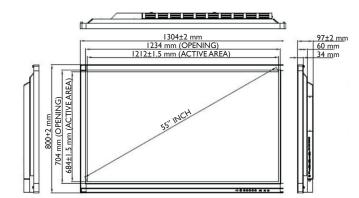

BenQ Europe B.V.

Meerenakkerweg 1-17 5652 AR Eindhoven The Netherlands Tel: +31 88 8889200 Fax: +31 88 8889299

© 2016 BenQ Corp. Specifications may vary by region, please visit your local stores for details. Actual product's features and specifications are subject to change without notice. This material may include corporate names and trademarks of third parties which are the properties of the third parties respectively.

Wallmount

