
# **RP703** Interactive Flat Panel



# Input and Output Terminals

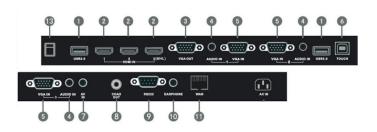

### **Features**

- Up to 20-point Multi-touch Interactivity
- Touch Driver Free & Multi-platform Support
- Built-in Android OS
- Built-in Smart Annotation Tool NFCPen & EZWrite Software
- Anti-Glare / Low Blue Light / Flicker free / Anti-bacteria Glass
- Touch OSD Menu

No.	Name	Description		
0	USB	Connect USB devices such as mobile hard disk, U disk, USB keyboard and		
		mouse, USB drivers, etc		
2 HDMI IN		High-definition multimedia interface signal input, connect to PC (person		
		computer) with HDMI output, set-top box, or other video device.		
		Touch signal is also supported. HDMI 3 input supports MHL		
8	VGA OUT	Connect to display devices with VGA input		
<b>3 4 5</b>	AUDIO IN	External computer audio input		
6	VGA IN	External computer image input		
6	TOUCH	RP703 has default touch screen. To make external computer touch		
		controlled: the driver should be installed, connect VGA and audio signal		
		of external computer, also connect USB port of external computer		
		to the RP703. (Default touch function works with PC, VGA and		
		HDMI inputs)		
Ø	AV IN	Composite video and audio input		
8	COAX OUT	Coaxial output		
9	RS232	Serial interface, used for mutual transfer of data between devices		
0	EARPHONE	Connect to device with headphone input		
0	WAN	Wan interface, connect RJ45 terminals. (Only for Android)		




### **Product Specifications**

Panel	Screen Diagonal	70''	
i mici	Backlight	LED	
	Resolution	1920 × 1080	
	Aspect Ratio	16:9	
	Brightness	300 nits	
	Contrast Ratio	4000 : I	
	Viewing Angle	178° / 178°	
	Color Gamut (x% NTSC)	66%	
		60Hz	
	Frame Rate		
	Response Time	8ms	
	Panel Bit	8-bit	
	Light Life	30,000 hrs	
	Orientation	Landscape	
Touch Solution	Touch Technology	IR	
	Number of touches	Multi-touch up to 20 touches	
	Touch Interface	USB x I	
	Resolution	32767 × 32767	
Cover Glass	Thickness	Tempered, 4 mm	
	Hardness	7H	
	AG Coating	80%	
Speaker	Built-in Speaker	10W x 2	
Interface	Input	Power (AC) inlet	x l
		Audio line-in	×3
		Composite video	x l
		Composite audio	x l
		D-sub	×3
		Type A HDMI	×3
		Type A (USB Playback)	× 4
		RS232	x l
		LAN	x l
	Output	D-sub	x l
	'	Earphone	x l
		COAX	x l
	Others	NFC Reader / Writer	x l
		IR receiver	x l
Mechanical	Dimensions (W $\times$ H $\times$ D) (without packing / with packing)	1665 x 1015 x 98 mm / 1803 x 1160 x 243 mm	
	Net Weight / Gross Weight	55kg / 68kg	
Power	Power supply	AC100 to 240V. 50 to 60 Hz	
	Power Consumption	222W	
OSD	On-Screen Display Languages	EN / EF / SP / EP / CN / TC / GM / DT / PL / RS / CZ / DN / SW / IT / RM / FN / NG / GK / TK /	
	The second propriet confedence	AB / JP (21 Languages)	
Accessories	Standard	Remote Control w/ Battery	x l
Accessories	Star idal d	Power Cord (by region)	×4
		Touch pen	× 2 (NFC)
		Quick Start Guide	x 2 (NPC) x
		Audio cable	x l
			x l
		Touch cable (USB to USB)	
		VGA (D-sub 15pin) cable	x l

# **Product Specifications**

# 1665±2 mm (OBENING) 1594 mm (OPENING) 60 mm (OPENING) 34 mm (OPENING) 34 mm

# Wallmount



### BenQ Europe B.V.

Meerenakkerweg I-17 5652 AR Eindhoven The Netherlands Tel: +31 88 8889200 Fax: +31 88 8889299

Benq Because it matters